

Working Paper

**ECONOMIC RESTRUCTURING
IN EASTERN EUROPE
AND
ACID RAIN ABATEMENT STRATEGIES**

Markus Amann
Leen Hordijk
Ger Klaassen
Wolfgang Schöpp
Lene Sørensen

WP-91-026
August 1991



International Institute for Applied Systems Analysis □ A-2361 Laxenburg Austria

Telephone: +43 2236 715210 □ Telex: 079137 iiasa a □ Telefax: +43 2236 71313

**ECONOMIC RESTRUCTURING
IN EASTERN EUROPE
AND
ACID RAIN ABATEMENT STRATEGIES**

Markus Amann
Leen Hordijk
Ger Klaassen
Wolfgang Schöpp
Lene Sørensen

WP-91-026
August 1991

Working Papers are interim reports on work of the International Institute for Applied Systems Analysis and have received only limited review. Views or opinions expressed herein do not necessarily represent those of the Institute or its National Member Organizations.

Foreword

Calculations with IIASA's Regional Acidification INformation and Simulation (RAINS) model have shown that SO₂ and NO_x emission reductions that are presently committed within the UN Economic Commissions for Europe's Convention on Long-range Transboundary Air Pollution will not halt the acidification of the environment within Europe. At the same time there is growing concern that humanity's emissions of greenhouse gases, in particular CO₂, will alter the radiative balance of the Earth's atmosphere and cause climatic change, possibly leading to social and economic hardships for large segments of the world's population. At the root of both of these major environmental problems lies the combustion of fossil fuels to provide us with energy. It is obvious therefore, that an important measure to combat both regional acidification and climatic change would be to reduce our use of energy.

This paper represents an important analysis of the results of a reduction of energy use through economic changes in eastern European countries and will therefore be of interest to those who are concerned with the above mentioned problems.

Bo R. Döös
Leader,
Environment Program

Abstract

Acid rain abatement strategies in Europe are currently being discussed in view of the expiration of the Helsinki-Protocol on SO₂ emission reduction. The changing energy situation in eastern European countries is expected to have an influence on the deposition pattern in Europe. The paper presents a consistent energy scenario for eastern European countries and compares optimal strategies to reduce SO₂ emissions. These strategies are based on runs with the RAINS model in which environmental targets have been set based on critical loads for sulfur.

The analysis shows that economic restructuring and efficiency improvements in eastern European countries, as well as in western Europe, may result in significantly lower sulfur abatement costs. Potential assistance to eastern Europe to guarantee desired environmental standards in Western countries should therefore focus not only on providing emission control devices but also on the success of the economic transition process.

Key words: acid rain, eastern Europe, abatement strategy, RAINS, critical loads, target loads.

Contents

1.	Introduction	1
2.	The RAINS Model	3
3.	Energy Scenarios for Europe	4
3.1	The Official Energy Pathway	4
3.2	The Energy Efficiency-Scenario for eastern Europe	6
3.3	SO ₂ and CO ₂ emissions	9
3.4	The costs of emission reductions	11
4.	Target Loads for Acid Deposition in Europe	13
5.	Scenario Analysis	16
6.	Conclusions	21
6.1	Impacts for eastern Europe	21
6.2	Implications for strategies to achieve target loads	22
6.3	Implications for possible assistance for eastern Europe	23
	References	24

ECONOMIC RESTRUCTURING IN EASTERN EUROPE AND ACID RAIN ABATEMENT STRATEGIES

Markus Amann¹

Leen Hordijk²

Ger Klaassen¹

Wolfgang Schöpp¹

Lene Sørensen¹

1. INTRODUCTION

Since the UN/ECE Convention on Long-range Transboundary Air Pollution was established in 1979 acid rain abatement policies have been carried out in Europe. Two Protocols on international emission reductions have been signed under the Convention: in Helsinki, Finland in 1985 on the reduction of SO₂ emissions, and in Sofia, Bulgaria in 1988 on the emissions of NO_x. The Helsinki-Protocol calls for a 30% reduction of emissions of SO₂ to be reached by 1993 based on 1980 emissions.

As 1993 approaches the Helsinki-Protocol will to be revised. Re-negotiations started in 1990 and contain at least one new feature in comparison to the Helsinki-Protocol: rather than a flat

¹International Institute for Applied Systems Analysis (IIASA), A-2361 Laxenburg, Austria

²Centre for Environment Studies, Wageningen Agricultural University, 67 HB Wageningen, The Netherlands.

rate reduction, such as the 30% applicable to all countries, an effect-oriented approach is being pursued. This means that environmental targets had to be established. The targets are based on the concept of critical load, which has been defined as:

"a quantitative estimate of an exposure to one or more pollutants below which significant harmful effects on specified elements of the environment do not occur according to present knowledge" (Nilsson and Grennfelt, 1988).

Maps of critical loads for Europe have been produced (Hettelingh *et al.*, 1991) and currently these maps are the basis from which effect-oriented policies are derived.

In the early 1980s, when the Helsinki-Protocol was being discussed, the situation in eastern European countries was different. The restructuring in these countries, and the move toward market-oriented economies, will have consequences for the environmental situation. It is important, therefore, that the negotiations on acid rain abatement take into account these changed conditions. National energy projections originating from before 1989 are no longer valid.

This paper analyzes which effects the changes in eastern European energy policies might have on acid rain reduction policies. The analysis was carried out with the *Regional Acidification Information and Simulation (RAINS)* model developed at the International Institute for Applied Systems Analysis (IIASA) in Laxenburg, Austria. A short introduction to RAINS is presented in Section 2. Two different energy scenarios will be discussed in Section 3. One scenario represents the latest available governmental energy projections for the year 2000. For most Eastern countries, however, these forecasts date back several years and, as mentioned above, may no longer be valid. Therefore, another scenario has been developed by the authors which is based on a set of simple, but consistent, assumptions on the restructuring of the energy and economic systems in all eastern European countries. Target loads for acid deposition, as selected by ten European countries, are presented in Section 4. Cost optimal European abatement strategies, based on these targets, are calculated with the RAINS model. The optimization results are analyzed in Section 5. This section indicates the major differences which exist in the efforts that countries would have to make for acid rain abatement under the two alternative energy scenarios. Consequences for the negotiations under the Convention are shown in the final section.

2. THE RAINS MODEL

Since 1984 the Regional Acidification INformation and Simulation (RAINS) model has been developed at the International Institute for Applied Systems Analysis (IIASA). The model has been extensively documented in Alcamo *et al.* (1990) and has been used in various different ways (see *inter alia* Hordijk, 1986; Alcamo *et al.*, 1987; Batterman *et al.*, 1988). The RAINS model focuses on acidification of Europe's natural environment and on the deposition of sulfur and nitrogen compounds that leads to acidification. The model consists of a set of sub-models that cover the cause-effect chain: pollutant generation (energy scenarios, emission abatement options, costs of control), atmospheric transport and deposition, and environmental effects (forest soil, Scandinavian lakes, and groundwater). The model covers the whole of Europe, including the European part of the Soviet Union, using a resolution of 150*150 km for emission and atmospheric processes, and a grid system of 0.5° latitude * 1.0° longitude for environmental impacts. Pollutants included are: SO₂, NO_x, and NH₃.

Emission estimates of SO₂ and NO_x are based on energy data, fuel characteristics and combustion conditions (Amann, 1990a). The emissions of NH₃ have been estimated based on livestock data, nitrogen fertilizer use and appropriate emission factors.

The long-range transport of these pollutants has been modelled by the EMEP (Co-operative Programme for Monitoring and Evaluation of the Long-Range Transmission of Air Pollutants in Europe) atmospheric transport model (Eliassen and Saltbones, 1983; Iversen *et al.*, 1991). This model incorporates the effects of winds, precipitation, and other meteorological and chemical variables. RAINS contains transfer matrices between countries and grid-cells derived from the EMEP model.

Originally RAINS was built as a simulation model, with which alternative European abatement strategies could be evaluated. An optimization model has been added that has been extensively used to derive cost optimal policies for Europe (Batterman, 1988; Amann, 1990b; Amann *et al.*, 1991). The derivation of optimal policies from critical loads and target loads is currently the main use of RAINS.

3. ENERGY SCENARIOS FOR EUROPE

3.1 The 'Official' Energy Pathway

For reference the 'Official Energy Pathway' (OEP) reflects the individual national projections of fuel consumption for the year 2000. This scenario has been compiled based on material published by the United Nations (UN-ECE, 1990) and the International Energy Agency (IEA/OECD, 1990). Governments submitted data to these organizations and this has been harmonized for publication. In early 1991 ten western European countries provided updates of their recent energy policies to the authors, which have been incorporated into the database. In this scenario, however, information from eastern European countries dates back to the era before the political changes in 1989, and therefore reflects expectations of the former governments pursuing the economy of centralized planning.

According to these projections total primary energy demand between 1985 and the year 2000 was expected to increase by almost 30 percent in eastern European countries, excluding the USSR. Fastest growth was foreseen for electricity generation from nuclear power, with an increase by a factor of five, followed by a 33 percent growth of natural gas consumption. Liquid (+19 percent) and solid fuels (+13 percent) were expected to lose market shares. Whereas the final energy demand in industrial and transportation sectors average growth rates of 33 percent have been projected, only a 14 percent increase has been envisaged for private households.

Despite the fact that many eastern European governments established the improvement of energy efficiency as a major target for their national energy policies, the projections implied a further increase of energy intensities in centrally planned economies. Industrial energy intensity was planned to increase on average by eight percent from 4.50 PJ/Million DM GDP in 1985 to 4.86 PJ/Million DM GDP in 2000. The comparable level in western European market economies in 1985 was at 1.35 PJ/Million DM GDP. The major reasons for these large discrepancies are the bad performance of existing technical equipment in the former centrally planned economies with low energy efficiencies and the industrial structure of the national economies with the focus on energy intensive heavy industries.

A similar growth trend (a further expansion of 10 percent) was projected for energy consumption for transportation purposes in eastern Europe, which was already ten percent above the western European average level in 1985. The structures are rather different, since in eastern countries the major fraction of fuels has been used for freight transport; in western

countries private passenger traffic had higher importance. In 1985 domestic energy consumption (34 TJ/capita/year) was at equal levels in western and eastern Europe. For eastern countries the forecasts projected a 10 percent increase for the year 2000.

	ENERGY INTENSITY IN EASTERN EUROPE, 1985		
	INDUSTRY (PJ/Mill.DM GDP)	DOMESTIC (TJ/cap/yr)	TRANSPORT (PJ/Mill.DM GDP)
ALB	2.56	12	1.50
BUL	2.52	22	1.98
ČSFR	5.15	48	1.24
GDR	3.95	70	0.95
HUN	2.71	37	1.26
POL	3.44	40	0.90
ROM	7.30	24	1.66
YUG	3.99	10	1.34
AVERAGE-EAST	4.50	34	1.20
AVERAGE-WEST	1.35	34	1.07

Table 3.1. Energy intensities in eastern European countries in 1985.

	ENERGY USE PER SECTOR (PJ) IN 2000						
	CON	PP	DOM	TRA	IND	OTH	SUM
ALB	17	65	53	48	48	11	242
BUL	218	744	394	314	1059	37	2766
ČSFR	198	814	844	220	1185	134	3395
GER-E	153	1092	885	289	1372	210	4001
HUN	9	311	403	150	505	123	1501
POL	206	1401	1749	477	1533	1	5367
ROM	247	618	680	481	1731	373	4130
YUG	339	1252	430	261	743	262	3287
SUM	1387	6297	5438	2240	8176	1151	24689

Table 3.2. Official Energy Pathway for the year 2000.

The following abbreviations have been used in the Table:

CON Conversion sector (refineries, coke production)

PP Power plants and district heat generation

DOM Domestic sector and services

TRA Transport

IND Industrial energy consumption

OTH Other, non-energetic use of fuels

3.2 The 'Energy Efficiency' Scenario for Eastern Europe

The 'Energy Efficiency in Eastern Europe' (EEE) scenario anticipates a transition of centrally planned economies to market economies and tries to project implications on energy efficiency. In the absence of reliable economic forecasts the scenario is based on the assumption that growth rates of GDP will follow the lines envisaged by former governments, but that major economic restructuring processes will take place, transforming industrial infrastructures from their current orientation on energy-intensive heavy industry towards more advanced production processes and less energy-intensive activities. Thereby, it is

assumed that overall energy intensities of eastern European countries will gradually approach average western European levels reported for 1985.

It is not the intention of this scenario to create a realistic projection of the actual energy demand of the year 2000 in eastern Europe. Uncertainties in the basic success and speed of transition processes to market economies are too high to allow accurate prediction. Therefore, necessary considerations on the feasibility and possible constraints, e.g., the availability of capital, of such transition processes are beyond the scope of this paper. Thus this scenario has to be considered as only one plausible projection to explore implications of energy efficiency on international emission reduction strategies.

The RAINS model is currently implemented for all European countries including the European part of the Soviet Union. Work is underway to regionalize and improve the data base for the Soviet Union. In this paper modifications of energy pathways are restricted to Albania, Bulgaria, ČSFR, the eastern part of Germany (the former German Democratic Republic - GDR), Hungary, Poland, Romania and Yugoslavia.

To derive sectoral fuel consumption data for this scenario the following principles have been applied for final energy demand:

- A **GDP growth rate** equal to the increase in primary energy consumption projected in the OEP (on average 1.4 percent per year between 1985 and 2000).
- **Energy intensity of industrial production** will gradually approach the 1985 level of the average western European market economies. Since this process requires substantial efficiency improvements from 4.50 to 1.35 PJ/Million DM GDP, which can only be accomplished through major structural changes of the industry, it is assumed in this scenario that by the year 2000 only half of the necessary changes in infrastructure will be implemented. Consequently, the energy intensity will be between the individual 1985 and the envisaged level. This decline will be achieved partly by efficiency improvements of new production and combustion plants, and partly by restructuring the national economies towards less energy-intensive products with higher competitiveness on the world market.
- **Domestic energy consumption**, on a per-capita basis, will reach the 1985 level of western Europe.

- **Fuel demand for transportation**, per unit of GDP, will also adapt to the average value of western market economies.

For energy supply the following assumption have been made:

- Efficiency of **thermal electricity generation** will increase to 40 percent.
- If the assumptions above allow a decline of energy input, fuels with the **highest CO₂ emissions** will be the first to be **phased out**.
- In case of increasing energy demand, mainly in the transportation sector, **additional consumption** is supplied by fossil fuels with the **lowest CO₂ emissions**.

As displayed in Table 3.3 the assumptions described result in a drastically changed pattern of energy demand. The largest cut in energy consumption occurs in the industrial sector of the eight eastern European countries excluding the USSR, in which fuel demand drops by 32 percent compared to 1985 instead of the 33 percent increase projected by the 'Official Energy Pathway'. Total primary energy consumption is 25 percent below the 1985 level. Increasing GDP causes a 14 percent raise in energy use for transportation purposes, whereas domestic energy consumption is 31 percent lower than in 1985.

The priority on phasing out fuels with highest CO₂ emissions first, results in a 68 percent cut in brown coal consumption; the total demand for solid fuels drops by 54 percent and use of liquid fuels decreases by approximately 30 percent.

A detailed description of the 'Energy Efficiency Scenario' for eastern Europe can be found in Amann & Sørensen (1991).

	ENERGY USE PER SECTOR (PJ) IN 2000						
	CON	PP	DOM	TRA	IND	OTH	SUM
ALB	9	33	92	19	27	11	191
BUL	61	362	227	129	235	4	1018
ČSFR	105	905	550	248	302	51	2161
GER-E	106	1068	551	360	890	69	3044
HUN	78	316	358	150	279	123	1304
POL	156	1474	372	480	1042	1	3525
ROM	136	925	805	218	923	241	3248
YUG	117	670	370	274	491	127	2049
SUM	768	5753	3325	1878	4189	627	16540

Table 3.3. Energy Efficiency Scenario (EEE) for the year 2000. Abbreviations are listed after Table 3.2.

3.3 SO₂ and CO₂ emissions

Since energy combustion is a major source for a number of anthropogenic emissions to the atmosphere, modifications in energy consumption will have impacts on national emission levels. The availability of various emission control technologies does not allow derivation of national emission data directly from fuel consumption data, since actual emission levels are also strongly determined by the extent of application of such technological abatement options. Table 3.4 displays the two extreme levels of SO₂ emissions for each scenario:

- The 'no control' case, in which no emission reduction measures are applied to fuel combustion indicates the upper range of emissions.
- The 'maximum feasible reduction' case explores the level of remaining emissions after application of all currently available emission control technologies.

	SO ₂ Emissions (kt)		
	1985	OEP Scenario	EEE Scenario
ALB	121	167-41	78-38
BUL	1070	1555-236	152-11
ČSFR	3150	2513-708	1743-114
GER-E	5360	5048-1158	3892-431
HUN	1404	1529-580	1018-128
POL	4300	4165-749	3427-425
ROM	1800	3261-313	2544-232
YUG	1500	2393-321	1093-124
SUM	18705	20631-4106	13947-1503
Change	--	+10% - -78%	-25% - -93%

Table 3.4. Sulfur emissions (in kt SO₂) for eastern European countries for 1985 and the two energy scenarios

The phase-out of fuels with highest specific CO₂ emissions decreases also SO₂ emissions. If no additional abatement efforts were taken, SO₂ emissions of the energy efficiency scenario would be almost 30 percent below the level of the OEP. The maximum achievable reductions, which are important to answer questions on the feasibility of achieving critical loads, would be 93 percent instead of 78 percent. In the same way, energy efficiency improvement would have positive impacts on CO₂ emissions. Instead of a 17 percent increase in the OEP scenario, eastern European CO₂ emissions decline by 23 percent compared to 1985.

	CO ₂ Emissions (Mt)		
	1985	OEP Scenario	EEE Scenario
Brown coal	628	709	449
Hard coal	336	397	267
Coke, Briquettes	100	103	20
Gasoil, Diesel	100	128	99
Heavy Fuel Oil	133	134	88
Gasoline	105	139	83
Natural Gas	169	226	211
SUM	1571	1836	1217
Change	--	+17%	-23%

Table 3.5. CO₂ emissions (in Mt CO₂) for the eastern European countries, excluding the Soviet Union, for 1985 and two energy scenarios.

3.4 The costs of emission reductions

The RAINS model contains a submodule to estimate national emission control costs for any energy consumption scenario (Amann, 1989; Amann, 1990a). This evaluation takes into account the most relevant emission control technologies for reducing SO₂ and NO_x emissions, i.e., use of low-sulfur fuels, combustion modification, flue gas desulfurization and denitrification etc., and determines the cost of application under country-specific conditions. Energy conservation and fuel substitution are excluded from the economic analysis.

These technology- and country-specific cost estimates can be combined with data on energy consumption into 'national cost curves of emission reduction' to display the overall national costs to achieve certain levels of emission reductions. If cost-effectiveness is taken as criterion curves representing increasing marginal and total costs for increasing levels of emission reductions can be easily derived. As indicated above, the shapes of such cost curves are rather sensitive to modifications in energy consumption structures. Consequently,

major differences have to be expected between the cost curves for the Official Energy Pathway (OEP) and the Energy Efficiency case (EEE).

To illustrate the sensitivity of such cost curves an example for the ČSFR is displayed in Figure 3.1. For each scenario the figure shows the level of unabated emissions, (the lower end of the cost curves with zero abatement costs), and indicates the increase of emission control costs for decreasing remaining emissions. Abatement costs are displayed as total annual cost (Million DM per year) required to achieve the desired level of remaining emissions.

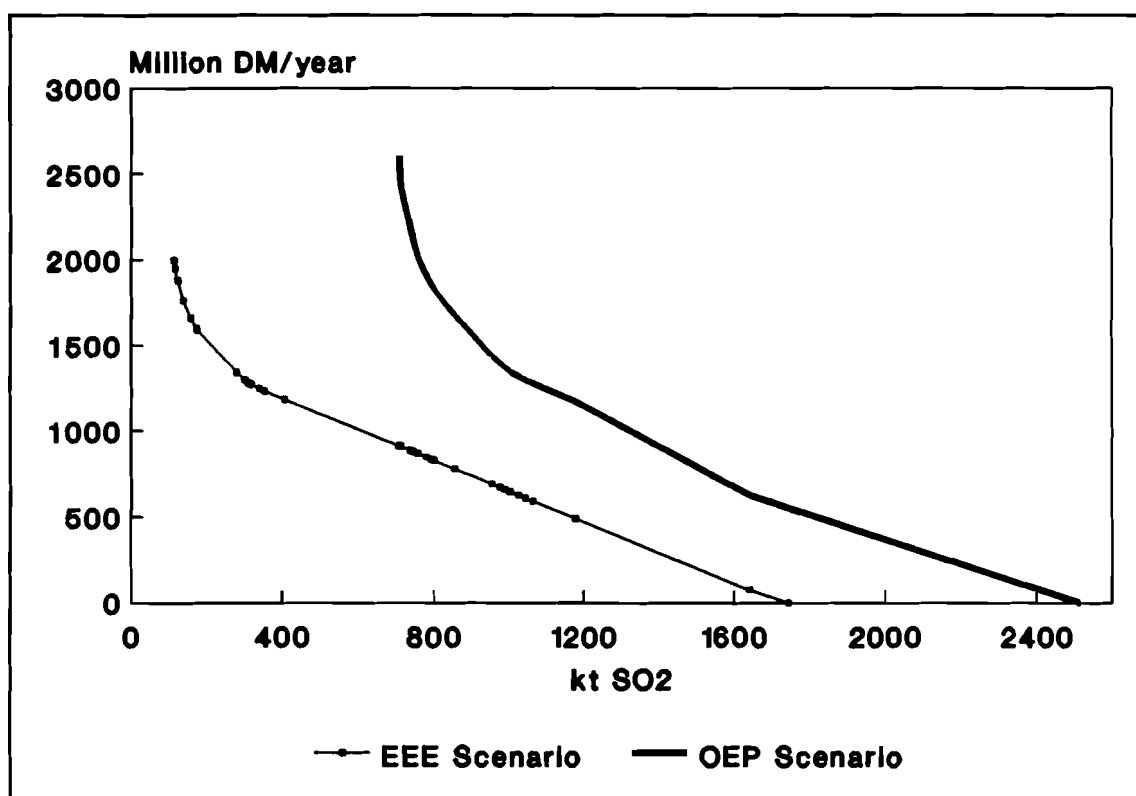


Figure 3.1. Cost curves of SO₂ reduction in the ČSFR

The reduction in energy consumption results in a considerable lower level of the Czechoslovakian SO₂ emissions even in the absence of any emission control measures. Instead of 2513 kt of SO₂ only 1743 kt would be emitted in a no-control case. Application of abatement technologies enables minimum emissions to be feasible at a drastically lower level. The large amount of lignite combustion in the OEP case limits the minimum emission level to 78 percent reduction in comparison 1980, whereas the phase-out of this fuel in the EEE scenario enables a 96 percent decline. In addition, significantly lower funds are required

for reductions of SO₂ if energy efficiency is improved. For example, a 50 percent reduction from the 1980 levels would be a free side-effect of the EEE scenario, whereas in the OEP case some 800 million DM per year would be required. In the same way, in the EEE case a 78 percent reduction would only cost some 30 percent of the amount necessary in the OEP scenario.

4. TARGET LOADS FOR ACID DEPOSITION IN EUROPE

Critical loads reflect the maximum input of acid deposition which can be tolerated by sensitive ecosystems without environmental damage. In 1990, the first estimate of critical loads for acid deposition was established, with international cooperation, for the whole of Europe and has been published in Hettelingh *et al.* (1991). If the achievement of these critical loads is taken as a target for international environmental policy substantial emission reductions are required over large regions of Europe with zero-emission levels in some countries (Amann *et al.*, 1991). Thus critical loads are not considered as short-term policy targets; interim target loads have been introduced to establish a goal for the upcoming negotiations on the next sulfur protocol in Europe.

Presently, target loads for acid deposition have been specified by ten European countries (Table 4.1). In some cases these intermediate target loads have been derived through specification of a certain fraction of the ecosystems to be protected, in other cases by balancing estimates of environmental damage and expected emission abatement costs. In order to derive targets for sulfur deposition, provisions had to be made to account for deposition and uptake of base cations. Target loads used in this paper are listed in Table 4.1.

The map of target loads is displayed in Figure 4.1.

Country	Target Loads g S/m ² /yr	Remarks
Austria	0.71 - 1.21	5-percentile of the critical loads, corrected for base cation balance
Denmark	0.5 - 0.75	corrected for base cation balance
Finland northern part	0.3	
southern part	0.5	
France	0.51 - 2.27	5-percentile of the critical loads, corrected for base cation balance
Netherlands	1.28	total acidity 2400 eq. H ⁺ /ha of which N _{max} ⁺ = 1600 eq. H ⁺ /ha. Hence 800 < S < 2400 eq. H ⁺ /ha.
Norway	0.5	
Sweden Norrland	0.3	
remaining part	0.5	
Switzerland	0.71 - 0.94	5-percentile of the critical loads, corrected for base cation balance
United Kingdom	0.32 - 1.6	
USSR	0.68 - 3.4	corrected for base cation balance

Table 4.1. National target loads used in this paper.

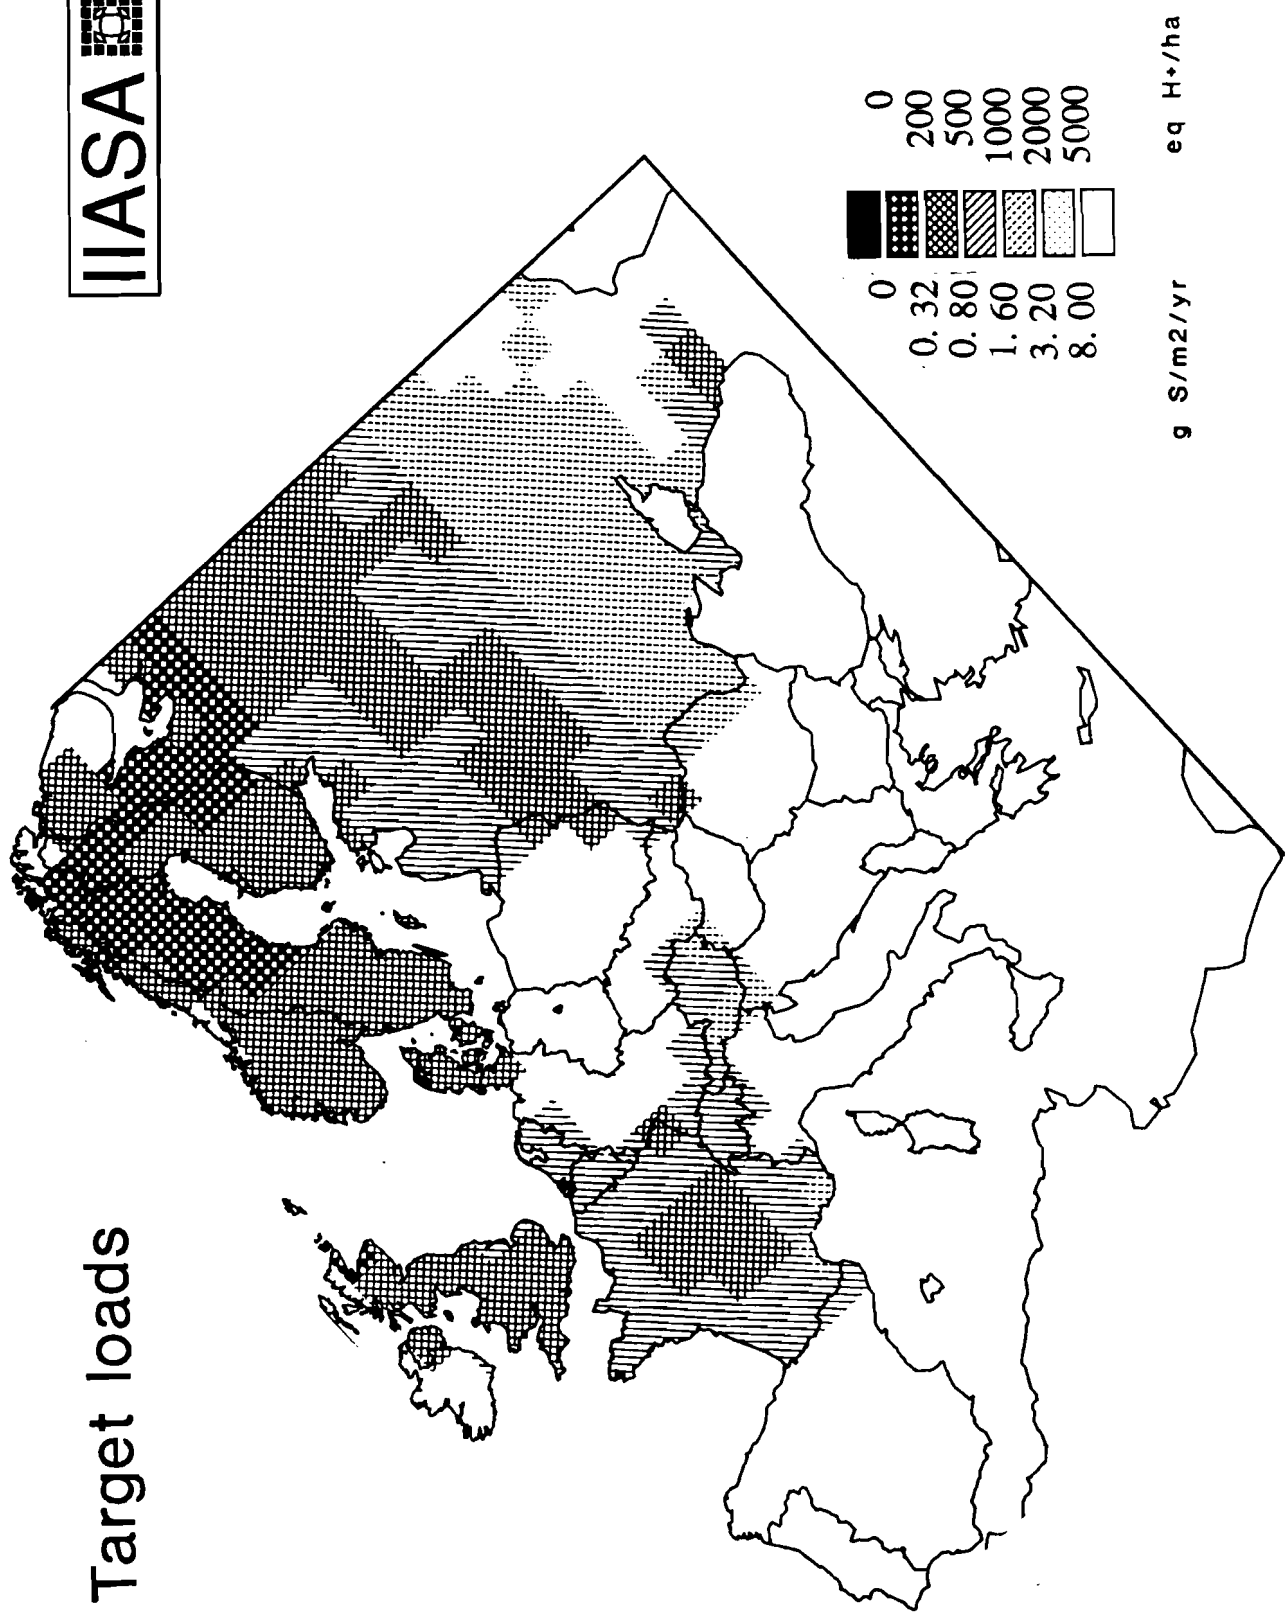


Figure 4.1. Map of (interim) target loads for sulfur deposition in Europe. Source: Country submissions to Coordinating Center for Effects, RIVM, Netherlands.

5. SCENARIO ANALYSIS

The RAINS model has been used to derive the cost-minimal international allocation of emission reductions to achieve specified target loads for sulfur deposition. The optimization procedure takes into account the spatial distribution of the target loads, the country-specific costs of emission reductions and the atmospheric linkages of long-range transport of sulfur between the emission sources, and the receptor sites for which target loads have been established. Details on the RAINS optimization module can be found in Shaw *et al.* (1988).

The costs and emission reductions required to achieve the target loads in the year 2000 are presented in Tables 5.1. to 5.3 for both energy scenarios: for the Official Energy Pathway (OEP) and for the efficiency improvement scenario for Eastern Europe (EEE). Resulting reduction levels are compared with the currently planned emissions reductions (CRP) for the year 2000 (Amann *et al.*, 1991).

Both scenarios, as shown in Table 5.1 and 5.2, imply an overall emissions reduction of approximately 72 percent over the 1980 emissions, which is more than twice as high as the current commitments. The highest reductions are necessary in north-western Europe where the specified target loads are close to the minimum deposition level achievable through application of all available emission control technologies, e.g., in Belgium, Denmark, Finland, Germany, Netherlands, Sweden and the United Kingdom. The tight target loads in this region require high reductions almost irrespective of involved costs of abatement. Consequently, between the two scenarios no major differences occur for these countries.

Large differences, however, can be observed for eastern European countries whose emissions have substantial impact on acid deposition in areas with target loads (ČSFR, East Germany, Hungary, Poland, and the USSR). An optimization based on the EEE scenario determines significantly lower remaining emissions than in the OEP case in which no energy efficiency improvements are assumed. Although the required percentage reduction levels are higher in the case of the EEE scenario, (ČSFR 95 percent instead of 77 percent, East Germany 88 percent instead of 75 percent, Hungary 90 percent instead of 64 percent, Poland 86 percent instead of 82 percent, etc.), absolute sulfur removal, through control technologies, is substantially lower due to the low baseline emissions caused by less energy consumption. Compare the emission levels in Table 5.2 with the unabated levels in Table 3.4: in ČSFR 1326 kt SO₂ are removed instead of 1803 kt, in East Germany 3400 kt instead of 4040 kt,

in Poland 2830 kt instead of 3410 kt, etc. Consequently, removal costs are lower in ČSFR, East Germany and Poland by some 35 percent, and in Hungary by 46 percent.

Larger differences occur for countries who do not have close atmospheric connection to areas protected by target loads, i.e., Portugal, Spain, Romania, Yugoslavia etc. This is caused by the high amount of brown coal combustion in the OEP case in eastern Europe (ČSFR, Hungary, Poland) which limits the maximum sulfur removal at sources close to the areas with target loads. Therefore, in this scenario desired reductions in sulfur deposition to achieve the target loads can not be attained entirely through measures at close sources. Instead, these have to be achieved by controlling distant emitters, e.g. by reducing Yugoslavian emissions by 71 percent and Romania's emissions by 81 percent. Since the energy efficiency (EEE) case lower emission levels can be attained in the eastern key countries (for example in Poland, ČSFR, East Germany, and Hungary), the necessity to control distant sources no longer exists. Thereby, reduction levels decline for Yugoslavia to 8 percent and to 33 percent for Romania. Not surprisingly, the cost saving in these countries is substantial.

Higher emission reductions in eastern countries in the EEE scenario do also relax abatement requirements for some western countries. For example, through efficiency improvements in eastern Europe, Austrian SO₂ emissions have only to decline by 32 percent instead of 80 percent in the OEP case. Thereby, costs in Austria decline by 68 percent, although no assumptions for the Austrian energy system have been modified; the energy efficiency improvements apply only to eastern countries. This effect is significant also in other countries who have specified target loads for their own territory, for example in Finland, Norway, and Sweden. In total, these four countries save 55 percent of their emission control costs.

Although this cost saving effect applies to the majority of countries it cannot be generalized. In contrast to the cases mentioned the efficiency improvements in eastern countries require an increase of reduction efforts in Switzerland, although Switzerland is relatively far from these eastern countries. To explain this phenomenon it is necessary to recall the relaxation of reduction requirements for distant countries such as Yugoslavia, Romania, and also Spain and Portugal, which was made possible through additional control in eastern countries relatively close to the tight target loads in Scandinavia, for example in Poland and East Germany. These additional reductions in the eastern countries do satisfy the nordic requirements, but do not fully compensate the increase of sulfur deposition at the Swiss target areas caused by higher emissions in Southern Europe. Therefore, the deficit in Switzerland can be covered most efficiently by higher emission reductions in Switzerland itself.

	Emissions			Control costs		
	OEP	EEE	Diff.	OEP	EEE	Diff.
	kt SO ₂			Mill.DM/yr		
Countries close to tight target loads (BEL, DK, FRA, GER-W, IRE, LUX, NL, UK)	1440	1477	+3 %	18015	17593	-2 %
Eastern countries close to areas with target loads (ČSFR, GER-E, HUN, POL)	3201	1405	-56 %	13417	8515	-37 %
Countries with moderate target loads (AUT, SWI, FIN, NOR, SWE)	415	725	+75 %	2424	1085	-55 %
Countries far from areas with target loads (ALB, BUL, GR, ITA, POR, ROM, SP, TK, YU)	7396	9723	+31 %	12665	4569	-64 %
USSR	2746	1732	-37 %	14286	2399	-83 %
TOTAL	15198	15062	-1 %	60807	34161	-44 %

Table 5.1. Comparison of SO₂ emissions and abatement costs

	Emissions (kt SO ₂)			Reduction compared to 1980 (%)		
	OEP	EEE	CRP	OEP	EEE	CRP
Albania	70	78	167	31	23	-65
Austria	78	223	78	80	43	80
Belgium	69	95	427	92	89	48
Bulgaria	348	152	520	66	85	50
ČSFR	710	147	2169	77	95	30
Denmark	21	21	178	95	95	60
Finland	98	220	115	83	62	80
France	341	340	1334	90	90	60
Germany, West	379	379	860	88	88	73
Germany, East	1158	494	1500	75	88	65
Greece	857	920	919	-114	-130	-130
Hungary	581	170	1094	64	90	33
Ireland	58	58	234	74	74	-5
Italy	565	566	2255	85	85	41
Luxembourg	6	7	10	75	71	58
Netherlands	44	44	106	91	91	77
Norway	42	61	68	70	57	52
Poland	752	594	2900	82	86	29
Portugal	232	363	304	13	-36	-14
Romania	314	1120	3261	83	38	-81
Spain	1404	2177	2889	57	33	11
Sweden	124	164	104	76	68	80
Switzerland	73	57	60	42	55	52
Turkey	3260	3254	3254	-279	-278	-278
UK	522	533	2446	89	89	50
USSR	2746	1732	8220	79	86	36
Yugoslavia	346	1093	2393	73	16	-84
Total	15198	15062	37864	73	72	29

Table 5.2. Emission and percentage reductions for the year 2000. (CRP=Current Reduction Plans; Negative numbers indicate an increase of emissions)

	Abatement costs (million DM/year)			Costs as percent of GDP (%)		
	OEP	EEE	CRP	OEP	EEE	CRP
Albania	90	0	0	0.64	0.00	0.00
Austria	651	210	658	0.26	0.08	0.26
Belgium	1554	1216	152	0.44	0.34	0.04
Bulgaria	1293	0	1046	1.07	0.00	0.86
ČSFR	2541	1711	281	1.10	0.74	0.12
Denmark	743	747	88	0.28	0.29	0.03
Finland	934	297	181	0.37	0.12	0.07
France	2105	2111	0	0.09	0.09	0.00
Germany, West	6725	6749	3627	0.25	0.26	0.14
Germany, East	4515	2815	750	1.34	0.84	0.22
Greece	50	0	0	0.03	0.00	0.00
Hungary	892	475	198	0.64	0.34	0.14
Ireland	282	282	0	0.34	0.34	0.22
Italy	2979	2987	600	0.16	0.16	0.00
Luxembourg	29	16	4	0.19	0.11	0.03
Netherlands	892	893	539	0.16	0.16	0.09
Norway	166	92	77	0.07	0.04	0.03
Poland	5469	3514	1375	1.22	0.78	0.31
Portugal	134	0	53	0.12	0.00	0.10
Romania	3481	1158	0	1.70	0.56	0.00
Spain	988	424	195	0.13	0.06	0.03
Sweden	660	429	385	0.16	0.11	0.10
Switzerland	13	57	44	0.00	0.02	0.01
Turkey	0	0	0	0.00	0.00	0.00
UK	5685	5579	1453	0.30	0.30	0.08
USSR	14286	2399	4790	0.50	0.08	0.17
Yugoslavia	3650	0	0	1.98	0.00	0.00
Total	60807	34161	16496	0.35	0.19	0.09

Table 5.3. SO₂ abatement costs in the year 2000.

6. CONCLUSIONS

A possible approach of the energy intensities of former centrally planned economies to typical western European values will result in considerably lower energy consumption in eastern Europe. Such a decline of energy consumption will presumably have favorable impacts on the competitiveness of national economies. Furthermore, a substantial improvement in the environmental situation can be expected:

6.1 Impacts for eastern Europe

The 'energy efficiency' scenario developed assumes a major economic restructuring process in Eastern countries to structures comparable with western market economies. The implied decline of heavy industry results in a trend of decreasing energy intensities to the average level observed in western Europe. If a partial restructuring is assumed to be achieved by the year 2000, total primary energy consumption declines by 25 percent between 1985 and the year 2000. This cut in energy consumption and related restructuring of energy supply systems leads to CO₂ emissions 23 percent below the 1985 level; SO₂ emissions would be 25 percent lower if no technological abatement measures were taken.

Such a change in the energy consumption structure does not only have impacts on the level of unabated CO₂ and SO₂ emissions, but also on costs required to control remaining emissions. For all the countries analyzed national emission control costs to achieve certain levels of emission reductions are substantially lower if energy efficiency improvements are assumed. As an example, to achieve specified target loads for sulfur deposition eastern Europe would have to spend some 20 billion DM/year less for abatement of sulfur emissions if energy efficiency were improved.

The full costs and benefits of structural changes are difficult to estimate. However, the cost savings derived can be taken as indicators to determine the cost-effectiveness of possible measures to improve energy efficiency. Since these numbers only take into account the benefits for SO₂ reduction it has to be kept in mind that energy efficiency improvements often have also other positive impacts which are not quantified in this analysis, for example on the trade balance, employment, exploitation of non-renewable resources, etc.

6.2 Implications for strategies to achieve target loads

According to the 'critical/target loads' concept emissions should be reduced until acceptable regional levels of depositions are achieved, i.e., the critical or target loads. Necessary emission reductions can be internationally allocated aiming at an international cost minimum. However, such optimization results are sensitive to modified assumptions on emission control costs. As indicated, changes in energy consumption forecasts do have an influence on estimated emission reduction costs. Consequently, the optimization procedure results in different abatement schedules for each of the energy scenarios.

As demonstrated efficiency improvements do not only lead to lower abatement costs within the country in which relevant measures are actually implemented. Through the international optimization approach such changes might also have positive impacts on control efforts required from other countries. As presented in Table 5.1 the lower energy consumption requires a European total of 44 percent below the costs of the reference case. In eastern Europe, in which the changes are assumed, a 37 percent cost saving occurs, whereas in western countries with moderate target loads costs are 55 percent lower.

The achievement of selected target loads in western Europe, which are often related to accepted levels of environmental damage, crucially depends on the willingness of all European countries to implement the required reductions. If countries drop out of the optimized abatement schedule, others have to compensate for the lacking reductions:

- If countries do not participate in the cooperative effort, the Europe wide cost-minimal solution can only be maintained by an international transfer of funds to implement the necessary measures at the optimal places.
- If such transfers did not take place and some of the 'optimal' measures were not implemented, target loads can only be maintained if other countries compensate lacking reductions by additional control at other places, e.g., within their own territory). Total European abatement costs are therefore necessarily higher since the cost optimality principle is violated.

In either cases, i.e., transferring funds or transferring abatement measures, the donor countries will face additional costs over and above those initially allocated for domestic measures.

6.3 Implications for possible assistance for eastern Europe

Currently specified target loads put high demands for emission reductions not only on countries in western and northern Europe, who have established target loads for their own territory, but also on countries in economic transition processes who have not announced target loads yet.

According to the optimization results based on the OEP scenario the majority of resources has to be spent in countries without target loads for their own territory. Furthermore, caused by the comparatively low economic performance in eastern Europe, burdens posed on these national economies, expressed as percentage of the GDP required for emission control measures, are in many cases much higher than in western Europe (see Table 5.3). In many eastern European economies between 1.0 and 2.0 percent of their GDP would be required to reduce emissions, whereas the European average, including these eastern countries, is only at 0.35 percent of the GDP. However, at present all these demands are mainly caused by the established target loads in western Europe. In order to encourage the implementation of the suggested measures in eastern countries, and thereby guarantee the cost-optimal achievement of the western target loads, it might be in their own interest if the West assisted eastern countries to achieve required reductions. It is important to state that any financial support for eastern countries has to be on top of the measures specified in the OEP scenario for measures in the West.

If, however, the energy efficiency scenario is taken as a basis, abatement efforts in eastern countries are significantly lower. Burdens to eastern economies range in most cases between 0.3 and 0.8 percent of the GDP, (instead of 1.0 to 2.0 percent in the OEP case). The improvement of energy efficiency in eastern Europe allows also the West to considerably decrease its own abatement efforts even if no assistance to the East is considered. Consequently, it should be in the vital self interest of the West to ensure the success of the restructuring process.

The considerable cost saving potential for the West might motivate western countries to explore the possibilities to promote the success of the restructuring process. In contrast to the OEP case assistance has not only to ensure the proper installation of emission control devices, but must also guarantee the timely accomplishment of the structural changes in the economy leading to the increase of energy efficiency.

If such assistance were to materialize in financial support for eastern Europe, western countries could utilize at least the difference in their abatement costs of the OEP and EEE scenarios to trigger the necessary processes in the East, and still show a cost saving compared to the OEP case. If financial transfers in the OEP case are assumed to be necessary, the benefits would be even larger. Furthermore, as indicated, a number of other positive impacts would be accomplished through this strategy as free side-effects, i.e., the decline of CO₂ emissions and economic improvements.

Although these conclusions suggest priority be given to the implementation of the economic restructuring process it has to be stressed that in both scenarios the efficient control of emissions of large combustion plants is an absolute necessity. The only difference, however, is that in the case of energy efficiency less large boilers will be operated and therefore less emissions have to be reduced. Strategies currently focusing on for example the desulfurization of the largest emitters in eastern Europe, would keep their validity as long as the basic principles of energy efficiency improvements are followed.

It should also be stressed that the magnitude of efficiency improvements necessary to approach western European levels can not only be achieved by application of more advanced combustion technologies; the larger part, however, would be contributed through structural changes of the economies towards less energy intensive industrial activities.

It should also be mentioned that although a number of assumptions have been made for deriving actual numbers of the energy efficiency scenarios, the main conclusions derived are robust in respect to modifications of these assumptions.

REFERENCES

Alcamo, J., M. Amann, J.-P. Hettelingh, M. Holmberg, L. Hordijk, J. Kämäri, L. Kauppi, P. Kauppi, G. Kornai, A. Mäkelä, (1987) *Acidification in Europe: A Simulation Model for Evaluating Control Strategies*, *AMBIO* 16:232-245.

Alcamo, J. (1990) *The RAINS Model of Acidification. Science and Strategies in Europe*, edited by R. W. Shaw and L. Hordijk. Dordrecht, Netherlands: Kluwer Academic Publishers.

Amann, M. (1989) *Potential and Cost for Control of NO_x Emissions in Europe*. Status Report SR-89-01. Laxenburg, Austria: International Institute for Applied Systems Analysis (IIASA).

Amann, M. (1990a) *Energy Use, Emissions, and Abatement Costs*. In: Alcamo *et al.*, pp. 61-102.

Amann, M. (1990b) *Using Critical Loads as Basis for Abatement Strategies in Europe*. EB.AIR/WG.5/R.7 UN/ECE, Geneva, Switzerland.

Amann, M., G. Klaassen and W. Schöpp (1991) *UN/ECE Workshop on Exploring European Sulfur Abatement Strategies (Background Paper)*, Status Report SR-91-03. Laxenburg, Austria: International Institute for Applied Systems Analysis.

Amann, M. and L. Sørensen (1991) *An Energy Efficiency Scenario for Eastern Europe*. Working Paper WP-91-xx (in print). Laxenburg, Austria: International Institute for Applied Systems Analysis.

Batterman, S.A. (1988) *Influential Receptors in Targeted Emission Control Scenarios, Systems Analysis - Modelling - Simulation* 5:519-532.

Batterman, S.A., M. Amann, J.-P. Hettelingh, L. Hordijk and G. Kornai (1988) *Optimal SO₂ Abatement Policies in Europe: Some Examples, Systems Analysis - Modelling - Simulation* 5:533-559.

Eliassen, A. and J. Saltbones (1983) *Modelling of Long-range Transport of Sulphur over Europe: A Two Year Model Run and Some Model Experiments*, *Atmospheric Environment* 17:1457-1473.

Hettelingh, J.-P. (1991) *Mapping Critical Loads for Europe*. UN-ECE Coordination Center for Effects Technical Report No.1, edited by R. J. Downing and P.A. M. de Smet. Bilthoven, Netherlands: National Institute for Public Health and Environmental Protection.

Hordijk, L. (1986) *Towards a Targeted Emission Reduction in Europe*, *Atmospheric Environment* 20:2053-2058.

IEA/OECD (1990) *Coal Information*. Paris, France: International Energy Agency

Iversen, T., N. Halvorsen, S. Mylona and H. Sandnes (1991) *Calculated Budgets for Airborne Acidifying Components in Europe, 1985, 1987, 1988, 1989 and 1990*. EMEP MSC-W Report 1/91. Oslo, Norway: Norwegian Meteorological Institute.

Nilsson, J. (1988) *Critical Loads for Sulphur and Nitrogen*. Miljørapport 1988:15, edited by P. Grennfelt. Nordic Council of Ministers, Copenhagen, Denmark.

Shaw, R.W., M. Amann and W. Schöpp (1988) *The Regional Acidification Information and Simulation Model: A Tool to Develop Emission Strategies and Assess their Effects*. In: Combustion Pollution Reduction. VDI Report 690, Düsseldorf, Germany.

UN-ECE (1990) *Review of National Strategies and Policies for the Abatement of Air Pollution*. ECE/EB.AIR/R.48. UN Economic Commission for Europe, Geneva, Switzerland.